

BEST AVAILABLE COPY

I hereby certify that this correspondence is being deposited with the United States Postal Service as first class mail in an envelope addressed to: Commissioner of Patents & Trademarks, Washington, D.C. 20231, on

8/24/83
(date)

BY

Bertram Ottinger
Bertram Ottinger, Reg. #14526

6
6
RECEIVED

AUG 26 1983

GROUP 220
LICENSING & REVIEW

IN THE UNITED STATES PATENT & TRADEMARK OFFICE

In re: Application of David W. Joynson, et al.

Serial No. 457,406

Group: 220

Filed: November 30, 1982

For: RADAR TRACKING SYSTEM

DECLASSIFIED UPON REMOVAL OF ENCLOSURES

New York, New York
August 24, 1983

Hon. Commissioner of Patents & Trademarks
Washington, D.C. 20231

Sir:

Further to the undersigned's Communication dated May 20, 1983, attached hereto is a certified copy of British application No. 8232892 dated November 19, 1982 in further support of applicants' claim of the benefit of said application.

Respectfully submitted,

KIRSCHSTEIN, KIRSCHSTEIN,
OTTINGER & COBRIN, P.C.
Attorneys for Applicants
666 Fifth Avenue
New York, NY 10103
(212) 581-8770

BY

Bertram Ottinger
Bertram Ottinger, Reg. #14526

/rak

UK SECRET

NATIONAL SECURITY INFORMATION
UNAUTHORIZED DISCLOSURE SUBJECT
TO CRIMINAL SANCTION

SDS/1965



THE PATENT OFFICE,
25 SOUTHAMPTON BUILDINGS,
LONDON. WC2A 1AY.

I, the undersigned, being an officer duly authorised in accordance with Section 62(3) of the Patents and Designs Act, 1907, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of documents as originally filed in connection with the Patent application identified therein.

I further certify that pursuant to Section 22(1) of the Patents Act, 1977, the Comptroller has ordered prohibition of publication of the said specification.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents, has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or the inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

**CERTIFIED COPY OF
PRIORITY DOCUMENT**

Witness my hand this 20 day of JULY 1983

Frank Kennard


C.O.C.6 (S.S.A.)

PATENTS ACT 1977

19 NOV 1982

PATENTS FORM No. 1/77 (Revised 1982)
(Rules 16, 19)

The Comptroller
The Patent Office
25 Southampton Buildings
London, WC2A 1AY

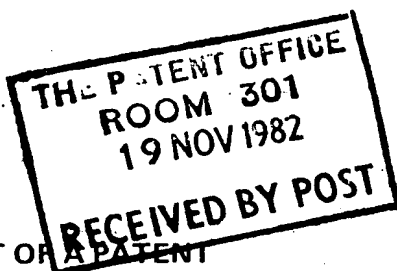

8232892

REQUEST FOR GRANT OF A PATENT

THE GRANT OF A PATENT IS REQUESTED BY THE UNDERSIGNED ON THE BASIS OF THE PRESENT APPLICATION

I Applicant's or Agent's Reference (Please insert if available) SDS/1965

II Title of Invention Radar Tracking System

III Applicant or Applicants (See note 2)

Name (First or only applicant) The Marconi Company Limited

Country United Kingdom State ADP Code No.

Address The Grove, Warren Lane, Stanmore, Middlesex, HA7 4LY

Name (of second applicant, if more than one)

Country State

Address

IV Inventor (see note 3)
PETER JAMES MacBEAN
DAVID WILLIAM JOYNSON
NIGEL STANSFIELD

~~Is the applicant a sole or joint inventor?~~
or
(b) A statement on Patents Form No 7/77 is ~~XXXX~~
furnished

V Name of Agent (if any) (See note 4) W.P. Keppler

ADP CODE NO

VI Address for Service (See note 5) Central Patent Department (Wembley Office)
The General Electric Company, p.l.c., Hirst Research Centre,
Wembley, HA9 7PP

VII Declaration of Priority (See note 6)

Country Filing date File number
United Kingdom 30th November 1981 8136055

VIII The Application claims an earlier date under Section 8(3), 12(6), 15(4), or 37(4) (See note 7)


Earlier application or patent number and filing date

RECEIVED
DATE 19th November 82

IX Check List (To be filled in by applicant or agent)

A	The application contains the following number of sheet(s)	B	The application as filed is accompanied by:-
1	Request 1 Sheet(s)	1	Priority document -
2	Description 26 Sheet(s)	2	Translation of priority document -
3	Claim(s) 6 Sheet(s)	3	Request for Search
4	Drawing(s) 5 Sheet(s)	4	Statement of Inventorship and Right to Grant
5	Abstract 1 Sheet(s)		

X It is suggested that Figure No 1 of the drawings (if any) should accompany the abstract when published.

XI Signature (See note 8) For and on behalf of The Marconi Company Limited

Their Attorney

NOTES:

1. This form, when completed, should be brought or sent to the Patent Office together with the prescribed fee and two copies of the description of the invention, and of any drawings.
2. Enter the name and address of each applicant. Names of individuals should be indicated in full and the surname or family name should be underlined. The names of all partners in a firm must be given in full. Bodies corporate should be designated by their corporate name and the country of incorporation and, where appropriate, the state of incorporation within that country should be entered where provided. Full corporate details, eg "a corporation organised and existing under the laws of the State of Delaware, United States of America," trading styles, eg "trading as xyz company", nationality, and former names, eg "formerly [known as] ABC Ltd." are not required and should not be given. Also enter applicant(s) ADP Code No. (if known).
3. Where the applicant or applicants is/are the sole inventor or the joint inventors, the declaration (a) to that effect at IV should be completed, and the alternative statement (b) deleted. If, however, this is not the case the declaration (a) should be struck out and a statement will then be required to be filed upon Patent Form No 7/77.
4. If the applicant has appointed an agent to act on his behalf, the agent's name and the address of his place of business should be indicated in the spaces available at V and VI. Also insert agent's ADP Code No. (if known) in the box provided.
5. An address for service in the United Kingdom to which all documents may be sent must be stated at VI. It is recommended that a telephone number be provided if an agent is not appointed.
6. The declaration of priority at VII should state the date of the previous filing and the country in which it was made and indicate the file number, if available.
7. When an application is made by virtue of section 8(3), 12(6), 15(4), or 37(4) the appropriate section should be identified at VIII and the number of the earlier application or any patent granted thereon identified.
8. Attention is directed to rules 90 and 106 of the Patent Rules 1982.
9. Attention of applicants is drawn to the desirability of avoiding publication of inventions relating to any article, material or device intended or adapted for use in war (Official Secrets Acts, 1911 and 1920). In addition after an application for a patent has been filed at the Patent Office the comptroller will consider whether publication or communication of the invention should be prohibited or restricted under section 22 of the Act and will inform the applicant if such prohibition is necessary.
10. Applicants resident in the United Kingdom are also reminded that, under the provisions of section 23 applications may not be filed abroad without written permission or unless an application has been filed not less than six weeks previously in the United Kingdom for a patent for the same invention and no direction prohibiting publication or communication has been given or any such direction has been received.

PATENTS ACT 1977


19 NOV 1982

PATENTS FORM No. 7/77 (Revised 1982)

(Rules 15, 82)

The Comptroller
The Patent Office
25 Southampton Buildings
London, WC2A 1AY

SDS/1965

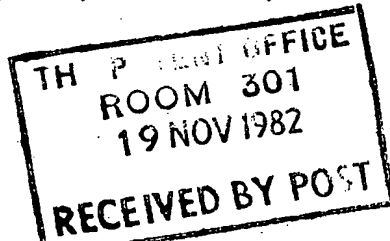

8232892

STATEMENT OF INVENTORSHIP AND OF RIGHT TO THE GRANT OF A PATENT

I Application No.

II Title Radar Tracking System

III I/We The Marconi Company Limited

the applicant(s) in respect of the above mentioned application for a patent declare as follows:--

- i) ☒ We believe the person(s) whose name(s) and address(es) are stated on the reverse side of this form (and supplementary sheet if necessary) is/are the inventor(s) of the invention in respect of which the above mentioned application is made;
- ii) The derivation of my/our right to be granted a patent upon the said application is as follows:--
The property in the invention is vested in ourselves
by virtue of Section 39(1)
- iii) I/We consent to the publication of the details contained herein to each of the inventors named on the reverse side of this form.

IV Signature
(see Note 3)

W.P. Keppler

Agent for the Applicants

PLEASE SEE OVERLEAF.

NOTES

- 1 The name(s) and address(es) of the inventor(s) are to be entered in the spaces provided alongside.
- 2 Where more than 3 inventors are to be named, the names of the 4th and any further inventors should be given on the reverse side of an additional blank copy of Patents Form No. 7/77 and attached to this form.
- 3 Attention is directed to rules 90 and 106 of the Patents Rules 1982.
- 4 The surnames or family names of individuals should be underlined.

David William Joynson,
Marconi Space & Defence Systems
Ltd.,
The Grove, Warren Lane,
Stanmore, Middlesex,
HA7 4LY

Peter James MacBean,
Marconi Space & Defence Systems
Ltd.,
The Grove, Warren Lane,
Stanmore, Middlesex,
HA7 4LY

Nigel Stansfield,
Marconi Space & Defence Systems
Ltd.,
The Grove, Warren Lane,
Stanmore, Middlesex,
HA7 4LY

~~CONFIDENTIAL~~
DECLASSIFIED
By Licensing Review

-1-

SDS/1965

Radar Tracking System

This invention relates to radar tracking systems for missiles directed against airborne targets.

The radar system may operate in an active mode in which the target is illuminated by radiation from the
5 missile and in which reflected radiation from the target (termed "skin echo") is received by the missile during its flight. The reflected radiation is processed to obtain the bearings, azimuth and elevation, and the
10 speed or range of the target so that the missile can follow the changes of direction and speed of the target.

An object of the present invention is the improvement of terminal accuracy in a pulse doppler radar seeker.

According to one aspect of the present
15 invention, in a monopulse radar tracking system including either or both of a doppler tracking loop and an angle tracking loop, there are provided means for deriving from a target echo an intermediate frequency (I.F.) signal, means for estimating an I.F. target
20 signal frequency periodically, digital filter means providing a frequency analysis of signals in the I.F. band, the characteristic of the filter means comprising a plurality of similar, sequential, overlapping peaking characteristics, defining respective adjoining frequency

~~CONFIDENTIAL~~
DECLASSIFIED
By Licensing Review

CONFIDENTIAL

DECLASSIFIED
By 11/10/03

-2-

bins, means for producing from target signals output in adjacent frequency bins in the vicinity of the estimated target signal frequency a derived signal characteristic having a peak at a predetermined position in relation to the estimated target signal frequency, and means for correcting the estimate of target signal frequency and shifting the derived signal characteristic accordingly, the target signal resulting from said derived signal characteristic being employed in a said tracking loop.

Where there is included a doppler tracking loop having a speedgate filter in the I.F. signal path, the derived signal characteristic may have sections centred symmetrically above and below the estimated target signal frequency, means then being provided for comparing target signal constituents of the respective sections and thereby determining the frequency error between the actual and estimated target signal frequency, the frequency error being employed to control the I.F. target frequency to tend to maintain it at a predetermined frequency within the pass band of the speedgate filter and to tend to bring the derived characteristic into alignment with the actual target signal frequency.

In a missile-borne radar tracking system as aforesaid the width of the frequency bins is preferably controllable in dependence upon the estimated value of the difference between the target signal frequency and the predetermined frequency within the speedgate pass band, the bin width being increased in response to a high estimated value to give good tracking ability and decreased in response to a low estimated value to give good velocity discrimination against targets moving at low relative velocities.

In a radar tracking system including an angle tracking loop employing sum and difference channels and

CONFIDENTIAL

DECLASSIFIED
By 11/10/03

CONFIDENTIAL

-3-

and means responsive to a ratio of the sum and difference channels and means responsive to a ratio of the sum and difference signals to provide an indication of angular error between target line of sight and boresight, each
5 of the sum and difference channels preferably employs means for producing a derived signal characteristic, each such derived signal characteristic comprising a peaking characteristic similar to the individual characteristics of the digital filter means and centred on the estimated
10 target signal frequency so as to provide a narrow frequency pass band which tracks the estimated target signal frequency.

According to another aspect of the invention, in a monopulse radar tracking system employing sum and
15 difference signals for the determination of target direction, the system comprising a doppler tracking loop maintaining an intermediate frequency target signal within a speedgate filter pass band, and digital filter means in each of the sum and difference channels providing
20 at periodic update intervals an analysis over a plurality of adjacent frequency bins of target signal components within the said pass band, and in a method of confirming the presence or absence of a target signal within a particular frequency bin, a series of comparison processes
25 are performed, each involving the sum of a predetermined number of successive power output values from the particular frequency bin accumulated with any previous such sums and a comparison of such cumulative sum with upper and lower threshold values which become progressively
30 closer with each comparison process, confirmation of the presence of a target signal in any comparison process being indicated when the upper threshold is exceeded by the cumulative sum, confirmation of the absence of a
35 target signal being indicated when the lower threshold

CONFIDENTIAL

~~CONFIDENTIAL~~

exceeds the cumulative sum, and a further comparison process being initiated when the cumulative sum lies between the upper and lower thresholds.

5 In such a method, a running average may be established incorporating a fixed number of bin power output values, the earliest incorporated bin power output value being discarded as a current value is incorporated so as to produce a running average bin power, this running average being compared with a
10 predetermined threshold to provide a target-signal-present or absent indication the cumulative sum indication and the running average indication contributing to a net conclusion in which the cumulative sum indication takes precedence if the running average
15 indication points to a target signal absent, and in which the possible results of the cumulative sum indication: target signal absent, indeterminate, present, are treated as: indeterminate, present, present, respectively if the running average indication points
20 to a target signal present.

According to a further aspect of the invention, a radar tracking system employing sum and difference signals for the determination of target direction, includes digital filter means in each of the sum and
25 difference channels providing at periodic update intervals an analysis over a plurality of adjacent frequency bins of potential target signal components, means for identifying a target frequency bin, means for applying sum and difference signals in respect of the
30 identified target frequency bin as input signals to product means for producing a complex product of one of the input signals and the complex conjugate of the other, a signal-to-noise ratio indication being derived from the imaginary component of the complex product and

~~CONFIDENTIAL~~

CONFIDENTIAL

-5-

a power level indication of the sum channel signal within the target frequency bin, the signal-to-noise ratio indication thus having a high value in the presence of incoherent reflections from multiple targets and a low value in the presence of coherent reflections from a single target, the system further including a basic signal-to-noise ratio indication derived from power level within the target frequency bin and average power level over the plurality of frequency bins, this basic indication thus having a high value in the presence of single or multiple targets within the target frequency bin and a low value in the presence of wideband noise, and means responsive to both of the signal-to-noise ratio indications to provide an indication of single or multiple targets.

The relevant features of one embodiment of a pulse doppler radar seeker will now be described, by way of example, with reference to the accompanying drawings, of which:-

Figures 1, 2 and 3 together show, in block diagram form, the basic elements of the system,

Figure 2 showing a doppler tracking loop, and

Figure 3 showing an angle tracking loop together with single/multiple target discrimination circuitry;

Figure 4 is a table illustrating a combination of target confirmation tests;

and Figure 5 is a block diagram of an angle tracking and servo-control system.

CONFIDENTIAL

CONFIDENTIAL

-6-

In that part of the tracking system shown in Figure 1, an antenna 1 transmits radar pulses of frequency controlled by a local oscillator 4 and doppler tracking control path 6, the local oscillator and control signals being combined by a mixer 8 and applied to the antenna by way of an amplifier 9 and circulator 11, in known manner. The antenna includes a so-called comparator circuit which takes the target echo (and any other received signals) as received by a square array of four elements of the antenna and produces three output channels, the azimuth and elevation difference channels 13 and 15 and the sum channel 17, again in known manner.

The antenna is steerable with respect to the missile by means of servo-controlled motors 19 to attempt to maintain the antenna boresight directed at a target. The actual direction of the boresight relative to the missile is determined by gimbal 'pick-off' transducers 21.

The sum and difference signals are applied to respective mixers 23, 25 and 27 which each have an input from the local oscillator 4. The transmitted frequency is the sum of the local oscillator frequency, a basic intermediate (I.F.) frequency derived from a voltage controlled oscillator (VCO) 29, and the estimated doppler frequency \hat{f}_d corresponding to the voltage applied to the VCO 29 and being the output of the doppler-tracking loop. The output of the mixers 23, 25 and 27 is therefore the I.F. plus the error in the estimation of the doppler frequency (true doppler frequency = f_d).

The mixers 23, 25 and 27 are followed by head amplifiers 33, 35 and 37.

Electronic angle tracking (E.A.T.) circuitry

CONFIDENTIAL

CONFIDENTIAL

-7-

then follows in which a respective proportion of the sum signal is added into each of the difference channels, the proportion being k_a for the azimuth difference and k_e for the elevation difference. This proportion is
5 calculated to produce a net zero difference channel signal and thus simulate alignment of the boresight and target, the actual off-boresight angle information (apart from error in the derivation) being contained in the control signals \hat{E}_a and \hat{E}_e (estimated boresight/target
10 sightline error) applied to the E.A.T. elements 39 and 41 on lines 47 and 49.

The resulting sum and difference signals are applied to range gates 53, 55 and 57 which are open for a predetermined short time at a controlled delay
15 period after each radar pulse transmission. The timing of this delay period is controlled by a range tracking loop circuit 59. The sum channel is branched to feed an auxiliary range gate 51 which differs from the others in that the gated period is in two halves in one of which
20 the gated signal is inverted. The output of the sum range gate 57 and the part inverted output of the auxiliary range gate 51 are applied to a phase-sensitive-detector which thus gives a zero output if the received signal lies equally in the first and second halves of the
25 auxiliary gate. If the signal lies earlier or later, the PSD output will have a net negative or positive value which is used by the RTL circuit 59 to re-centre all of the range gates on the target signal. The target is thus effectively range tracked.

30 The range tracking loop 59 also applies an inhibit signal to the transmitter amplifier 9 while the range gates are open to ensure that no breakthrough of transmitted pulse through the circulator 11 can interfere

CONFIDENTIAL

~~CONFIDENTIAL~~

-8-

with target echo signals.

Following the range gates 51, 53, 55 and 57, the sum and difference signals are applied to speedgates 61, 63, 65 and 67 respectively. These are in fact band pass filters covering the possible range of doppler frequencies of interest and centred on the above mentioned intermediate frequency. The doppler tracking loop attempts to maintain the various sum and difference target frequencies in the centre of the speedgate pass bands by control of the VCO 29.

The sum and difference signals are then scaled in accordance with the sum channel signal level by agc amplifiers 71, 73, 75 and 77 controlled by an agc detector 69.

The signals until this point have all been analogue but are now converted by analogue digital converters 81, 83, 85 and 87 for the purpose of digital frequency analysis. In each of the sum and difference channels is a fast-fourier-transform (FFT) filter (91, 93, 95 and 97). Each such filter comprises an array of perhaps 32, 64, 128, 256, filter elements, typically say, 128, these filter elements respectively covering adjacent narrow frequency bands and together covering the speedgate passband. The frequency bands of such an FFT filter are known, and will be referred to in this specification, as frequency bins. The characteristic of each bin is of peaked form and overlaps with those of the adjacent bins. The bin outputs arise in digital form, representing the amplitude and phase of the signal component within the particular bin. One set of such output data requires information from 128 analogue samples. The output data rate of the FFT filters, i.e. the 'update rate' is 78 Hertz if the FFT overall bandwidth is 10 kHz and there are 128 bins. Thus the update rate is equal to the individual bin width.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~
~~DECLASSIFIED~~
By Licensing & Review

The output data rate of the FFT filters, i.e. the 'update rate' may then be about 80 Hertz.

The width of the frequency bins is controllable, as indicated by control circuitry 89, thus covering the I.F. range with few, broad bins, or a greater number of correspondingly narrower bins.

Each of the sum, difference, and range channels is thus analysed into 128 (say) frequency bands within the IF doppler range and a target signal frequency can be identified very narrowly.

Referring now to Figure 2, this shows the remainder of the doppler tracking loop, which is entirely digital and is constituted by processes performed by a data processor. The input is derived on line 97' from the sum channel FFT filter 97 in Figure 1, the single input 97' representing all of the 128 sum bin outputs. A target bin detection process 101 makes an initial estimate of the target bin identity, as will be explained, giving an initial target bin frequency \hat{f}_0 , (as a displacement from the speedgate centre frequency).

A sliding filter process 103 to which the FFT filter-outputs are applied, produces, in response to the initial estimate of target frequency \hat{f}_0 , a derived characteristic comprising two individual bin characteristics disposed symmetrically above and below \hat{f}_0 . One of these bins is derived from the left and centre ones of three adjacent bins and the other from the centre and right of the three. Discriminator (105), agc (107) and divider (109) processes produce an error signal ϵ_d , being the frequency error between the estimated target frequency (\hat{f}_0 in this case) and the actual target frequency.

The error signal ϵ_d is processed further, as will be explained, but in addition is directly added to the current target frequency estimate \hat{f} (initially

~~CONFIDENTIAL~~
~~DECLASSIFIED~~
By Licensing & Review

CONFIDENTIAL
DECLASS
By License & Review
10-

\hat{f}_0) in a process 111. The result is therefore the current magnitude of the target doppler frequency relative to the speedgate I.F. centre frequency. This digital value is subjected to a gain control process G3 (113) and provided
5 as a digital output of the doppler tracking loop.

Referring again to Figure 1, the DTL output on line 113' is converted back to analogue form and applied to an integrator 121 which accumulates the doppler frequency error and controls the oscillator VCO (29)
10 accordingly. With a constant frequency error, i.e. constant target acceleration, the loop will lock on to the target frequency and cause the VCO frequency to ramp in tracking it. At constant relative target velocity the frequency error will cease, the VCO input will be
15 zero and the VCO output will remain constant at the IF.

An accelerometer 117 detects acceleration of the missile and adds in a corresponding factor to the integrator input by way of adder circuit 119.

Reverting to Figure 2, the further processing of the discriminator output, referred to above, is also employed to produce from a final addition 123 a signal \tilde{f} which is a further estimate of the target frequency to speedgate centre frequency error. This signal \tilde{f} is employed in a target confirmation process 125 to be
25 explained.

Confirmation of the target bin is employed in several ways: the electronic angle tracking process referred to in Figure 1 is enabled; the guidance system of the missile is enabled; and incidental to the main
30 arrangement a signal-to-noise indication is obtained for employment in multiple target detection, as will be explained.

Considering Figure 2 in greater detail now,

CONFIDENTIAL
DECLASS
By License & Review
10-

CONFIDENTIAL
DECLASSIFIED
By LSC/MS/11-
Review

and in particular the target bin detection process 101, it will be recalled that the FFT circuits in each sum and difference channel provide outputs giving the complex amplitude in each of the FFT filter 'bins' (typically 5 16, 32, 64, 128 or 256 'bins' according to the bin width control setting 89). The filter bin width is equal to the total FFT bandwidth divided by the number of filter bins and the output data rate is equal approximately to the bin width.

10 Target detection is carried out on all of the power outputs (i.e. the square of the sum of the real and imaginary components) of the sum channel FFT with the exception of the marginal bins at each end, i.e. the first and last N_L where $N_L = 9, 5, 3, 2, 2$ for 15 256, 128, 64, 32, 16 bin FFTs respectively. The power output of each bin is divided by the average of all the bins excluding the marginal first and last N_L , and then this value is compared to a threshold (T_D) which is determined so as to allow a certain number of crossings 20 if the input is pure thermal noise (false alarms). The technique used is to compare each bin power, scaled by the average power, as above, with the maximum scaled value of the previous bins and with the threshold T_D . The maximum bin at the end of the process which also exceeds 25 T_D is taken as a target alarm for the bin in question. If no bin exceeds the threshold then no alarm is found and the detection process is applied to the next set of FFT data. This detection method can be modified in practice to allow multiple alarms.

30 If the target alarm is found, its bin number and centre frequency \hat{f}_0 is output so that the doppler tracking loop and confirmation processes can act on the correct frequencies. An additional calculation is

CONFIDENTIAL
DECLASSIFIED
By LSC/MS/11-
Review

CONFIDENTIAL

DECLASS
By Licensing
12-

performed in the detection process. The contents of the alarm bin are reduced by the above threshold value T_D . This is done because the probability distribution of the maximum bin which exceeds a given threshold is approximately a constant (T_D) plus a Rayleigh distribution (provided T_D is $> \log_e N$). By subtracting the threshold value, the initial alarm can be treated in the same way as subsequent power outputs from the bin and this simplifies the confirmation system.

- 10 The calculations performed in the above process for each bin power p_i in order to establish the maximum power bin are:

$$r_i = p_i / \sum_{j=N_L+1}^{N-N_L} p_j$$

- 15 where r_i is the scaled power of a bin numbered i ; N is the total number of bins; N_L is the number of marginal bins; and j is the number of a bin within those considered for averaging. If $r_i > T_D$ and is also $> r_c^{\max}$ then r_c^{\max} is set $= r_i$ and i is stored as the alarm bin number. r_c^{\max} is the maximum value of r_i 'so far'. The stored value of i which remains when all bins have been considered is then the target alarm bin. This initial setting, or estimate, of the target frequency (\hat{f}_0 in Figure 2) is then employed to close the doppler tracking loop and initiate the target confirmation process. It will be appreciated that the target frequency, while being within the detected bin(1), will not in general be precisely the bin centre frequency \hat{f}_0 .

In order to get a high probability of target

CONFIDENTIAL
DECLASS
By Licensing

CONFIDENTIAL

-13-

acquisition with a low probability of 'false confirm' it is necessary to sum incoherently over a large number of FFT update periods. To make this possible, target tracking is necessary, since either the target must be
5 kept in a fixed bin or the alarm bin must be known in some other way. For this reason a two stage acquisition process is used. The first stage which has already been described detects the whereabouts of a likely target, the second, confirmation, ensures that this detected
10 signal is indeed a target with a high degree of certainty.

The method of operation of the confirmation process, referenced 125 in Figure 2, is as follows:- the 'alarm' bin \tilde{f} is designated by the doppler tracking
15 algorithm of Figure 2, except immediately after the first 'detect' when the detection subroutine provides this information. As in the detection algorithm, the equivalent of Equation (1) above is used to provide a scaled target/alarm bin output. (If the alarm bin is
20 out of the range N_L+1 to $N-N_L$ the scaled bin value is set to zero). Then this scaled 'target bin' value on one FFT data processing is added to the same quantity on the successive update. This summing continues until a
25 predetermined number of FFT power output values from the target bin have been added together. At this point the sum is compared to two thresholds, an upper and lower threshold. If the sum of the bins is greater than the
upper threshold then a 'target present' flag is set, if the sum is less than the lower threshold, 'target
30 absent' is confirmed, or in other words the suspected target is rejected. If the sum is in between then the flag remains in a 'don't know' state. In this case a further set of 'target' bin power values from successive

CONFIDENTIAL

CONFIDENTIAL

-14-

FFT updates are added to the first set and the accumulated total compared to two new and closer thresholds, the upper one again denoting 'confirmed presence' and the lower one 'confirmed absence'.

5 After a predetermined number of such comparison stages (provided as an input to the program) the upper and lower thresholds are made to coincide so that a definite decision is forced although it may not be conclusive, as will be seen.

10 This successive comparison test is called the 'cumulative sum' indication.

 At this point a running average of the last N sets, each of N FFT updates begins. As the current bin power value is incorporated in the running total the
15 earliest value so incorporated is discarded. The criterion for confirmation is that the running average should be above a threshold (normally taken to be the last comparison process converged-threshold) and that in addition the individual comparison processes
20 should not reject. This latter test is put in to ensure reasonably rapid response if the target should suddenly disappear for some reason.

 The result is a 'running average' indication.

 The 'cumulative sum' indication and the 'running
25 average' indication are combined as illustrated in Figure 4 to provide a net conclusion. It may be seen that the cumulative sum indication takes precedence if the running average indication is negative, while the cumulative sum indication is, in effect, endorsed by one level of
30 indication certainty if the running average indication is positive.

 In addition a certain amount of re-initialisation takes place. If the overall confirmation goes off the

CONFIDENTIAL

CONFIDENTIAL

-15-

'confirm present' state the running average is stopped. Also if the cumulative sum test rejects or confirms, the accumulation of sub-set sums ceases and each subsequent sub-set is tested separately.

- 5 When target confirmation (125) is complete the 'confirm present' output 126 is used to enable the angle tracking loop and the missile guidance loop.

10 The doppler tracking system employed allows doppler tracking to take place both within the digital processor of Figure 2 and through the analogue VCO 29 in Figure 1. The key function that allows tracking to take place within the data processor itself is the sliding filter/discriminator process, 103, 105, 107, 109.

- 15 To form a frequency discriminator the power output of two neighbouring bins can be subtracted. If the target signal sits symmetrically astride the junction of the two bins the power in each will be the same and the difference will be zero. If the target signal is off centre one way or the other the result will be
20 positive or negative accordingly. If two such bins, centred on a specified target frequency estimate, can be simulated, therefore, frequency shift from this central position can be detected and the target signal frequency tracked continuously.

- 25 To vary the position of the discriminator continuously in this way a technique of (effectively) sliding the filters of the FFT filter 97 is adopted, which requires the simulation of each of the two simulated bins mentioned above. The following applies
30 to the simulation of each of the two. Given the complex output of two existing adjacent FFT bins it is possible to construct by using these two quantities alone a new FFT bin which will have as its peak any chosen value of

CONFIDENTIAL

CONFIDENTIAL

-16-

frequency between the mid-point of the two original bins. In order to derive a simple algorithm a rectangular window is assumed and phase factors between adjacent bins of π/N are ignored. The new FFT bin characteristic
5 can be written approximately as:

$$f(x) = \frac{\alpha \sin \pi x}{x} + \frac{\beta \sin \pi (1-x)}{(1-x)} \quad (2)$$

where x is the fraction of a bin from the centre of the first FFT bin where the response is required, α is the amplitude contribution of the first bin, and β is the
10 amplitude contribution of the second bin. It can be shown that if α , β are related by a parameter δ as follows:

$$\alpha = \frac{-\delta^2 [1 + \pi \cot \pi \delta (1-\delta)]}{\pi \cot \pi \delta (\delta(1-\delta)(1-2\delta)) - 1 + 2\delta - 2\delta^2}$$

$$\beta = 1 - \alpha$$

15 then the point $f(x = \delta)$ is a maximum of the filter of Equation (2). Hence a sliding filter can be implemented by taking the frequency f , evaluating the bins nearest to this and then calculating the parameters α , β needed to give two filter bins each separated by one half a bin
20 separation from the estimated target frequency (\hat{f}). The same technique is used on the filters regardless of the type of window that is being used. The equations for the sliding filters thus become:-

$$\begin{aligned} N_{ta} &= \text{Integral part of } ((\hat{f} + 0.5B)t_s + 1.5) \\ x &= -0.5 + N_{ta} - N_p - \hat{f}t_s \\ C_1 &= \alpha(x) \text{ (i.e. the above function } \alpha \text{ calculated for predetermined set of } x \text{ values)} \end{aligned}$$

25

CONFIDENTIAL

CONFIDENTIAL

-18-

to give optimum performance. The agc is thus

$$agc_n = agc_{n-1}^k + (1-k) / C_{agc} / ^2 S_c$$

where S_c is another scale correcting factor for the
different gains found at different positions of the
5 sliding filter and different windows. This is given by

$$S_c = 1 + \bar{x} b_1 + \bar{x}^2 b_2$$

where b_1 and b_2 are constants depending on the type of
window. k equals $\exp(-t_s/t_{agc})$ where t_{agc} is the agc
time constant. The resultant discriminator output ξ_d
10 (from divider 109) is

$$\xi_d = d S_c S_d / (Agc_n t) \text{ Hz}$$

The digital tracking loop is closed entirely
within the data processor (see Figure 2) and provides
the estimate of target frequency \tilde{f} that is needed for
15 the confirmation process. The particular implementation
used is a type two loop. A block diagram of the system
is shown in Figure 2.

It can be seen that there are two outputs of the
loop, one for the confirmation process (\tilde{f}) and one
20 feedback (\hat{f}) to the sliding filter/discriminator. The
transfer functions of these two are different and are
given by

$$\frac{\hat{f}}{\tilde{f}} = \frac{zG_1(1+G_2) - G_1}{z^2 + z(G_1(1+G_2)-2) + (1-G_1)}$$

$$\frac{\tilde{f}}{\tilde{f}} = \frac{z^2G_1 + G_1(G_2-1)z}{z^2 + z(G_1(1+G_2)-2) + (1-G_1)}$$

25 Where f is the target frequency relative to the centre
of the IF sum channel. These transfer functions are

CONFIDENTIAL

-17-

$$C_a = C_1 b(N_{ta}-1) - (1-C_1) b(N_{ta})$$

$$C_b = (1-C_1) b(N_{ta}+1) - C_1 b(N_{ta})$$

where N_{ta} is the number of the bin 'intersected' by the required frequency, \hat{f} is the estimated doppler frequency according to the digital tracking loop, B is the overall FFT bandwidth, t_s is the update time (= No. of bins \div B), N_p is half the number of bins in the FFT and $b(N)$ is the N^{th} FFT bin (complex). Thus C_a and C_b are the sliding filter outputs of simulated adjacent bins centred on the frequency \hat{f} , and are again complex.

It is then necessary to construct the discriminator 105 of Figure 2, and this can be done by taking the frequency error $d = |C_a|^2 - |C_b|^2$. However, the sliding filter technique results in a scaling at the origin of this quantity which depends on filter position and hence a correction for this has to be applied. A quadratic correction term is used of the form

$$S_d = a_1 + a_2 \bar{x} + a_3 \bar{x}^2$$

where $\bar{x} = \min(x, 1-x)$ and a_1, a_2, a_3 take various values for the different window functions being used. This also allows the discriminator to be automatically scaled for the appropriate window function.

The discriminator output 'd' must also be automatically gain controlled and this is accomplished by a simple first order feedback system operating off a square law detector 107. The detector operates off a new bin of the form

$$C_{agc} = C_a + C_b$$

which gives a filter centred on the target frequency. In conjunction with the discriminator this is believed

CONFIDENTIAL

-19-

implemented by taking the output of the discriminator ϵ_d and then multiplying by the gain (G_1).

The algorithms for the implementation of these two closed loop transfer functions are as follows. If
5 the discriminator output is ϵ_d then

$$f_1(n) = f_1(n-1) + G_1 \epsilon_d$$

$$f_2(n) = f_2(n-1) + G_2 f_1(n)$$

$$\hat{f}(n) = f_1(n) + f_2(n)$$

$$\tilde{f}(n) = f_1(n) + f_2(n-1)$$

10 These algorithms are illustrated in Figure 2 as follows. The output ϵ_d of the discriminator processes 105, 107, 109 is subjected to a gain G_1 (127) producing an input $G_1 \epsilon_d$ to a summing process 129 a storage delay device 131 feeds back the output of the summing process
15 129 to its input at the following update. If $f_1(n)$ is the output of the summing process 129 on the nth update, $f_1(n)$ must therefore be equal to $G_1 \epsilon_d + f_1(n-1)$, the loop therefore constituting a digital integration. The output of the loop, $f_1(n)$ is applied to a further
20 storage delay device 133 whose output $f_1(n-1)$ is applied to a summing process 135. A second input to this summing process is derived from the output $f_1(n)$ of the above loop as subjected to a gain G_2 (137) to give $G_2 f_1(n)$ and a further integrating loop 139, 141 to give $f_2(n)$ equal
25 to $f_2(n-1) + G_2 f_1(n)$. A further storage/delay device 143 then gives $f_2(n-1)$ the other input to summing process 135.

The output of summing process 135 is thus
30 $\hat{f}(n-1) = f_1(n-1) + f_2(n-1)$ i.e. the estimated target frequency based on the preceding update of the FFT data. This output is applied to the sliding filter process 103

CONFIDENTIAL

CONFIDENTIAL

-20-

for calculation of the next error \mathcal{E}_d and is also applied to summing process 111 together with the current error \mathcal{E}_d as previously described, to provide the doppler tracking loop output.

5 The signal $f_2(n-1)$ is applied to a further summing process 123 but in this case with the current input to process 135, i.e. $f_1(n)$. The summed output of process 123 is thus $f_1(n) + f_2(n-1)$, denoted \tilde{f} and applied as the estimated target frequency to confirmation
10 process 125, as previously described.

Referring now to Figure 3 the FFT outputs from the azimuth difference filters 95 are input on lines represented by 95' and the sum FFT outputs similarly on lines 97'. These sum and difference outputs, each
15 from, typically, 128 bins, are applied to respective sliding filter processes 145 and 147 similar to those described for the doppler loop of Figure 2. In each case the estimated target frequency \hat{f} derived from the doppler loop is used to select the bin in which it falls,
20 a new or 'supposed' bin being derived from this bin and an adjacent bin, the simulated bin having its centre or peak frequency aligned with the estimated target frequency. Changes in the target frequency as determined by the doppler tracking loop cause the value of \hat{f} to change,
25 the simulated bin remaining locked to it and thus sliding up and down the I.F. range with the doppler error frequency and providing a high degree of target velocity discrimination.

The sliding filter outputs are in digital form
30 and are therefore applied to the digital equivalent of a phase-sensitive-detector. Thus the difference signal in complex form has its complex conjugate formed by a process 149. The sum and complex conjugate of the

CONFIDENTIAL

CONFIDENTIAL

-21-

difference are then multiplied together by a process 151 which produces real and imaginary outputs. The real part is divided by an agc detector (157) output to give the amplitude ratio for each of the two channels i.e.

$$5 \quad \frac{(D_e - k_e S)S}{\overline{S^2}} \quad \text{and} \quad \frac{(D_a - k_a S)S}{\overline{S^2}}$$

where $\overline{S^2}$, the mean square of the sum signal, is the output of the agc detector 157. Only the azimuth difference channel is shown but the elevation difference channel is treated similarly. This is fed to a Kalman filter in 10 Figure 5 to give an output $\hat{\epsilon}$. $\hat{\epsilon}$ is added to an aberration correction factor and fed to the EAT gain element to close the loop. The Kalman filter in Figure 5 produces an estimate $\hat{\epsilon}_a$ of the boresight error, that is, the estimated value of the target angle off boresight. 15 This error estimate is combined in a summing process 156 with a boresight direction indication relative to the missile. The latter is provided basically by gimbal pick-off transducers 21 (shown in Figure 1 also) corrected for radome aberration (150) which itself is 20 dependent upon; boresight direction relative to the radome; radome temperature (163); and transmitted frequency (161). The aberration corrector thus produces azimuth and elevation angles of the effective boresight rather than the physical boresight. 25 The resulting signal k_a output from summing process 156 is employed in Figure 1 to control the EAT element 41 and close the EAT loop.

When the EAT loop is in equilibrium the value $\hat{\epsilon}$ gives a true measure of the boresight error. 30 Considering now the imaginary output of the

CONFIDENTIAL

CONFIDENTIAL

-22-

product 151, this is divided by the agc signal in divider 153 to give a form of signal-to-noise indication. This output of the divider 153 gives an indication of the power of the signal components that are either incoherent
5 between the sum and difference channels or in phase quadrature. The 'incoherent' power component is large when thermal noise or jamming in either the sum or the difference channels is large, and tends to zero at high signal to noise ratio. The incoherent power output is
10 also large on extended targets or on targets flying in formation that are unresolved by the seeker.

The signal-to-noise (S/N) signal output from 153 is applied to a dividing process 159 the other input of which is derived from the S/N output of the
15 target confirmation process 125 of Figures 2 and 3. The two S/N indications differ in that the basic indication, from the confirmation circuit is derived as a ratio of the power in the target bin to the average power over the FFT band. It does not therefore
20 distinguish between a coherent single target in the target bin and incoherent multiple targets within the target bin. The QPSD S/N indication is derived solely from the target bin and distinguishes only between coherent (single) targets on one hand and multiple
25 targets and noise on the other, giving a low value for the coherent target and a high value for the incoherent targets. If, therefore, the QPSD S/N indication is divided by the basic S/N indication from the confirmation process the result will be a low value for a single
30 coherent target in the target bin and a high value for multiple targets in the target bin. The result of the division process 159 thus gives an indication of single or multiple targets.

CONFIDENTIAL

CONFIDENTIAL

-23-

The system as described is adaptable for the various missile/target conditions that may arise in an engagement, and in particular in the terminal stages where conditions may change rapidly.

5 The parameters in the doppler loop are made adaptive to allow for changing target conditions so that optimum performance is maintained at all times. Referring to Figure 2:

10 (i) Immediately after target detection, gains G1, G2 and G3 are set to high values so that the loop settles quickly. The gains are then reduced until, after a predetermined length of time, the gains take constant lower values to reduce the noise in the loop. The gains are increased as the missile flight progresses
15 according to the signal strength measured in the agc amplifiers (connection from agc not shown), or by one or other of the signal to noise assessment indications described above, and according to the FFT bin width selected (see below).

20 (ii) During the missile boost phase, the doppler tracking loop experiences substantial transients and the FFT bin width is selected to be a large value. Gains G1, G2 and G3 are also set to high values to give a rapid response.

25 (iii) If a target at long range is to be acquired, the FFT bin width is set to be very narrow, and G1, G2 and G3 are set to low values after loop pull in. This optimises the acquisition threshold.

30 (iv) If the target is at short range the FFT bin-width is set to be wide and G1, G2 and G3 are set to high values. This optimises acquisition speed and minimises tracking errors. A wide FFT binwidth gives a faster update rate and hence gives the optimum performance very close to impact when rapid response is

CONFIDENTIAL

CONFIDENTIAL

-24-

important. Target range is determined from the range tracking loop (Figure 1).

(v) Once the loop has pulled-in, the signal \hat{f} is proportional to the target frequency rate, i.e. the target acceleration. If \hat{f} is large the FFT binwidth is set to a high value to allow a rapid tracking ability. The loss in doppler discrimination against other targets at similar speeds is not important since a manoeuvring target is not able to keep in close proximity to other targets. When \hat{f} is small, a small FFT binwidth is used to give maximum doppler discrimination against targets flying in formation.

(vi) When multiple targets in close proximity are detected (e.g. by the output from divider 159 in Fig. 3) or the target acceleration is small, the FFT binwidth is set to a low value to give maximum doppler discrimination.

The overall angle tracking system can be conveniently divided into three parts. Firstly the EAT receiver, secondly the angle tracking filter and thirdly the servo control and stabilisation system.

A block diagram of the complete angle tracking and servo control system is shown in Figure 5. The angle tracking filter estimate \hat{e} of boresight error angle in each of the azimuth and elevation channels is used to add a controlled portion of the sum channel which corresponds to these angles according to the stored D/S slope at the origin, into the difference channels, as described above with reference to Figures 1 and 3. These difference signals then pass through similar IF chains as for the sum channel, are sampled and analogue-to-digital converted (81-87). They are then fourier transformed (91-97) to give the spectrum

CONFIDENTIAL

CONFIDENTIAL

-25-

of signals on the azimuth and elevation channels. The sum and difference channels are divided by agc signals digitally and elevation and azimuth phase-sensitive-detector outputs are formed (155) by taking the real
5 part of $D \cdot xS$; these outputs are proportional to the angular error between the true target boresight error and the best estimate of the boresight error. These calculations are all performed at the same update rate as the doppler and range tracking loops (i.e. at the
10 update rate of the FFT output).

After the PSD's (151) it is necessary to perform an axis transformation in order to transform from receiver axes to line of sight axes. This is implemented digitally. These signals are then passed
15 through an angle tracking (Kalman) filter (171) which produces best estimates of sight line rate using a variable gain algorithm. The sight line rate signals are used in various ways; firstly they provide an output to the autopilot as the guidance command, for
20 which purpose they are transformed into missile axes; they are also used as the input to the EAT integrator which feeds estimate of angle back to the EAT element and finally it is used as input to the line of sight observer (173) to drive the antenna mechanism. This
25 latter is added to an inertial reference unit (IRU) gyro output (175) in order to provide the total movement of the target as measured in line of sight axes.

These angular rates are still calculated at the (low) update rate of the loop. These rates are
30 then integrated using a high update digital integrator 177 and the output is transformed from line of sight axes into motor shaft angles using digital axes transformations 179. The angle demands are then used to control a position control loop 181 for the antenna.

CONFIDENTIAL

CONFIDENTIAL

-26-

The angle demand 183 is subtracted from the potentiometer pick-offs 21 and the error is fed into a controller 185 which feeds demands to the antenna mechanism, servo and motors 187. The antenna/reflector plate is thus position slaved to the integrated IRU gyro and the target sight line error. A high update rate controller is used. The effect of this is to remove body motions on the receiver output. An additional line of sight feed back 189 is used to the EAT element (39, 41). This is added to the other feedback path and ensures that the best estimate of sight line error can be used to subtract from the actual sight line error for EAT. The combined EAT feedback path has to be angle transformed (191) back into receiver axes and a radome aberration correction (159) is added in, as a function of the gimbal angles, as described in relation to Figure 3.

The Kalman filter parameters are varied as a function of conditions during missile flight and in general are arranged to give high bandwidth when the estimated time to impact is small. Time to impact is estimated by dividing the missile-target range (from the range tracking loop) by the closing velocity (from the doppler tracking loop). The filter bandwidth is also made a function of signal to noise ratio, the bandwidth being low when the signal to noise ratio is low.

It may be seen that a versatile tracking system has been described. The sliding filters permit discrimination between closely spaced targets the doppler resolution being twice as good as with fixed FFT filters.

An improved signal/noise ratio can also be obtained by sliding the simulated bin peak on to the target.

Discrimination of multiple targets, e.g. by tracking one target and monitoring another, can be achieved merely by duplicating the sliding filters.

CONFIDENTIAL

CONFIDENTIAL

-27-

CLAIMS

1. A monopulse radar tracking system, including either or both of a doppler tracking loop and an angle tracking loop, means for deriving from a target echo an intermediate frequency(I.F.) signal, means for estimating an I.F. target signal frequency periodically, digital filter means providing a frequency analysis of signals in the I.F. band, the characteristic of said filter means comprising a plurality of similar, sequential, overlapping, peaking characteristics, defining respective adjoining frequency bins, and means for producing from target signals output in adjacent frequency bins in the vicinity of the estimated target signal frequency a derived signal characteristic having a peak at a predetermined position in relation to said estimated target signal frequency, means for correcting the estimate of target signal frequency and shifting said derived signal characteristic accordingly, the target signal resulting from said derived signal characteristic being employed in a said tracking loop.

2. A radar tracking system according to Claim 1, including a doppler tracking loop having a speedgate filter in the I.F. signal path, wherein said derived signal characteristic has sections centred symmetrically above and below the estimated target signal frequency, and means are provided for comparing target signal constituents of the respective sections and thereby determining the frequency error between the actual and estimated target signal frequency, said frequency error being employed to control the I.F. target frequency to tend to maintain it at a predetermined frequency within the passband of said speedgate filter and to tend to bring said derived characteristic into alignment with

CONFIDENTIAL

CONFIDENTIAL

-28-

the actual target signal frequency.

3. A radar tracking system according to Claim 2, wherein said derived characteristic comprises two, overlapping, peaking characteristics similar to the individual characteristics of said digital filter means, the two bin characteristics thus derived having peaks displaced on opposite sides of the estimated target signal frequency by half of a frequency bin width.
4. A radar tracking system according to Claim 3, wherein said means for comparing target signal constituents of the respective sections comprises means responsive to the power outputs within the two derived bin characteristics and means for obtaining an algebraic difference of the power outputs to indicate the degree and direction of the frequency error.
5. A radar tracking system according to any of Claims 2, 3 and 4, wherein said frequency error is added to the estimated target frequency to provide a controlling signal tending to maintain the I.F. target signal in the centre of the speedgate pass band.
6. A radar tracking system according to any of Claims 2 - 5, wherein said digital filter means comprises an array of fast fourier transform filters each providing one said frequency bin, the output data being up-dated periodically and at each such up-date providing a new estimate of the target signal frequency derived from the preceding estimate and the current error.
7. A missile-borne radar tracking system according to any of Claims 2 - 6 including means responsive to high acceleration rates of the missile to increase the width of said frequency bins and thus improve the quality of tracking at the expense of target discrimination.
8. A radar tracking system according to Claim 7

CONFIDENTIAL

CONFIDENTIAL

-29-

wherein said doppler tracking loop incorporates controllable gain elements which are set to high gain values in response to high acceleration rates.

9. A missile-borne radar tracking system according to any of Claims 2-8, wherein the width of said frequency bins is controllable in dependence upon target range, the bin width being set to a low value in response to a long range target to optimise the acquisition threshold.

10. A radar tracking system according to Claim 9, wherein said doppler tracking loop incorporates controllable gain elements which are set to low gain values in response to a long range target.

11. A missile-borne radar tracking system according to any of Claims 2 - 10 wherein the width of said frequency bins is controllable in dependence upon the estimated value of the difference between the target signal frequency and said predetermined frequency within the speedgate pass band, the bin width being increased in response to a high estimated value to give good tracking ability and decreased in response to a low estimated value to give good velocity discrimination against targets moving at low relative velocities.

12. A radar tracking system according to Claim 1 including an angle tracking loop employing sum and difference channels and means responsive to a ratio of the sum and difference signals to provide an indication of angular error between target line of sight and boresight, wherein each of said sum and difference channels employs means for producing a said derived signal characteristic, each such derived signal characteristic comprising a peaking characteristic similar to the individual characteristics of said digital filter means and centred on the estimated target signal frequency so as to provide a narrow frequency pass band which tracks the estimated target signal frequency.

CONFIDENTIAL

CONFIDENTIAL

-30-

13. In a monopulse radar tracking system employing sum and difference signals for the determination of target direction, the system comprising a doppler tracking loop maintaining an intermediate frequency target signal within a speedgate filter pass band, and digital filter means in each of the sum and difference channels providing at periodic update intervals an analysis over a plurality of adjacent frequency bins of target signal components within the said pass band, a method of confirming the presence or absence of a target signal within a particular frequency bin, in which a series of comparison processes are performed, each involving the sum of a predetermined number of successive power output values from the particular frequency bin accumulated with any previous such sums and a comparison of such cumulative sum with upper and lower threshold values which become progressively closer with each comparison process, confirmation of the presence of a target signal in any comparison process being indicated when the upper threshold is exceeded by said cumulative sum, confirmation of the absence of a target signal being indicated when the lower threshold exceeds the cumulative sum, and a further comparison process being initiated when the cumulative sum lies between the upper and lower thresholds.

14. A method according to that of Claim 13 wherein after a said series of a predetermined number of said comparison processes the upper and lower thresholds are made coincident so as to force a target-signal-present, or absent, indication.

15. A method according to Claim 13, wherein a running average is established incorporating a fixed number of said bin power output values, the earliest incorporated bin power output value being discarded as a

CONFIDENTIAL

CONFIDENTIAL

-31-

current value is incorporated so as to produce a running average bin power, this running average being compared with a predetermined threshold to provide a target-signal-present, or absent, indication, the cumulative sum indication and the running average indication contributing to a net conclusion in which the cumulative sum indication takes precedence if the running average indication points to a target signal absent, and in which the possible results of the cumulative sum indication: target signal absent, indeterminate, present, are treated as: indeterminate, present, present, respectively if the running average indication points to a target signal present.

16. A radar tracking system employing sum and difference signals for the determination of target direction, the system including digital filter means in each of the sum and difference channels providing at periodic update intervals an analysis over a plurality of adjacent frequency bins of potential target signal components, means for identifying a target frequency bin, means for applying sum and difference signals in respect of the identified target frequency bin as input signals to product means for producing a complex product of one of said input signals and the complex conjugate of the other, a signal-to-noise ratio indication being derived from the imaginary component of said complex product and a power level indication of the sum channel signal within the target frequency bin, said signal-to-noise ratio indication thus having a high value in the presence of incoherent reflections from multiple targets and a low value in the presence of coherent reflections from a single target, the system further including a basic signal-to-noise ratio indication derived from power level within the target frequency bin and average power level over the plurality of frequency bins, this basic indication thus having a high value in the presence of single or multiple targets within the target frequency bin and a low value in the presence of wideband noise,

CONFIDENTIAL

CONFIDENTIAL

-32-

and means responsive to both of said signal-to-noise ratio indications to provide an indication of single or multiple targets.

17. A monopulse radar tracking system incorporating fast-fourier-transform digital filters providing echo signal analysis within a plurality of adjacent frequency bins, and means for simulating a frequency bin at a selected intermediate point in the range of frequency bins, substantially as hereinbefore described with reference to the accompanying drawings.


18. A monopulse radar tracking system incorporating means for detecting and confirming the presence of a target, substantially as hereinbefore described with reference to the accompanying drawings.

19. A monopulse radar tracking system incorporating means for distinguishing between single and multiple targets, substantially as hereinbefore described with reference to the accompanying drawings.

CONFIDENTIAL

CONFIDENTIAL


Fig. 1.

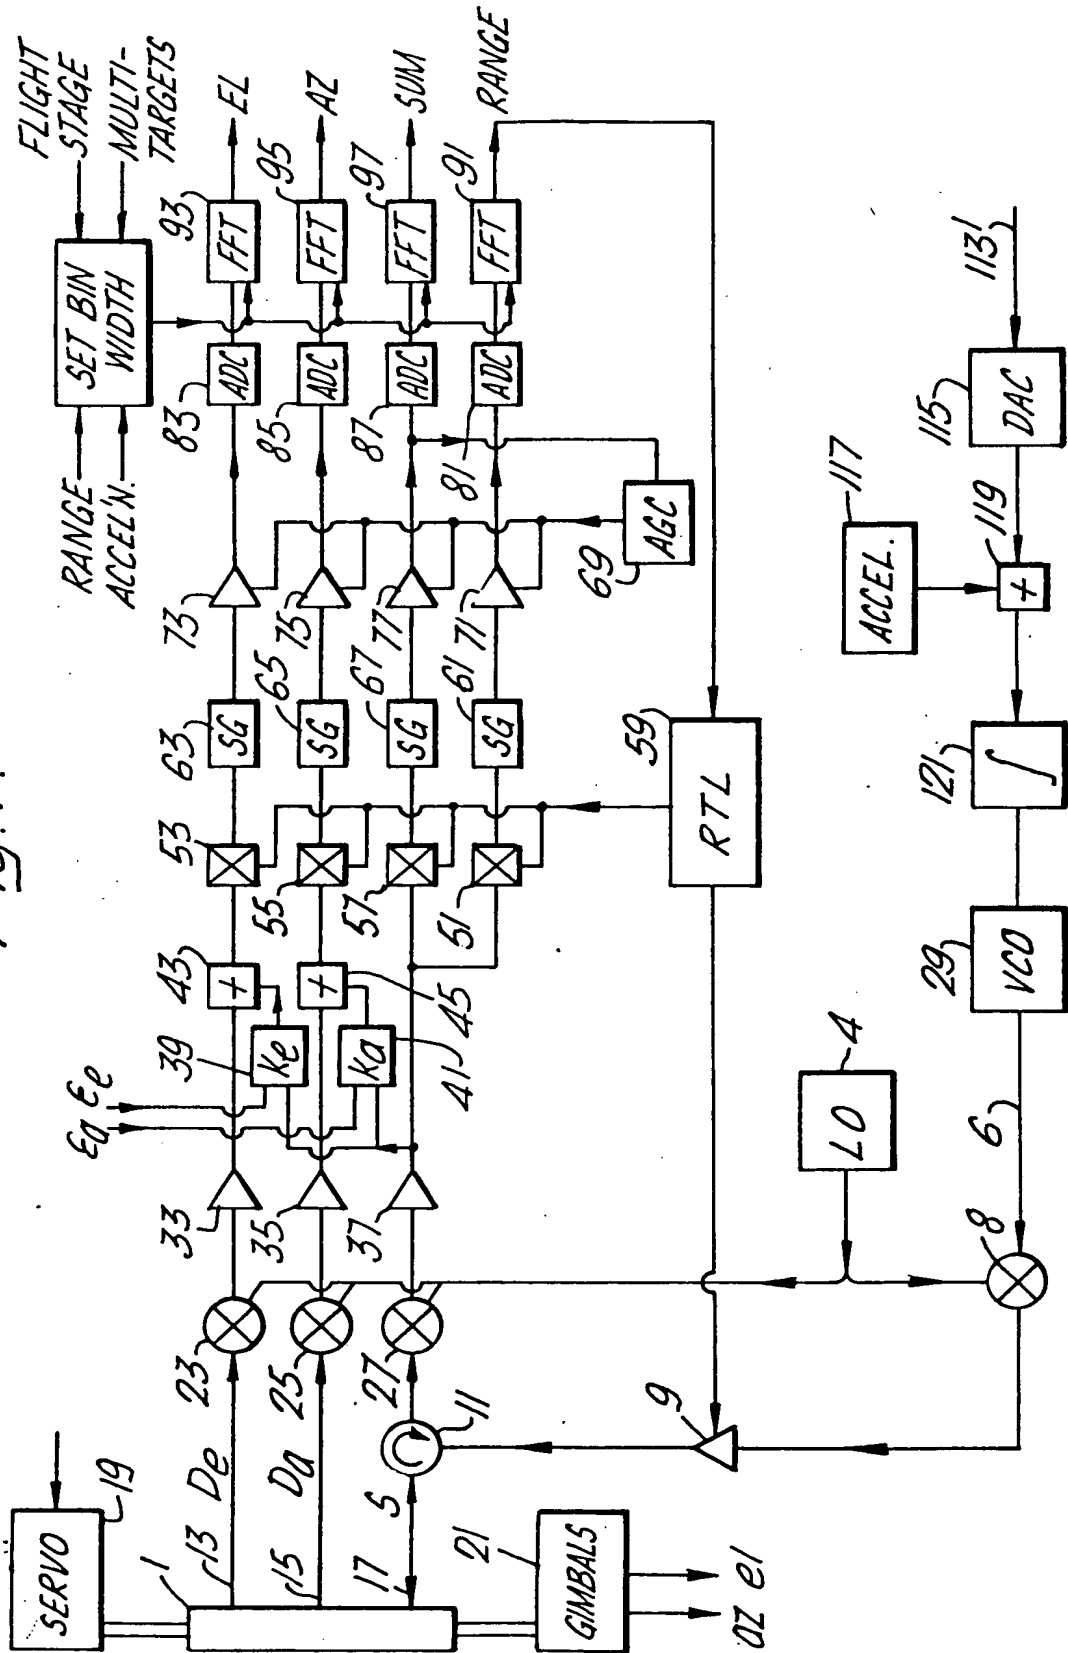

CONFIDENTIAL

CONFIDENTIAL

Fig. 2.

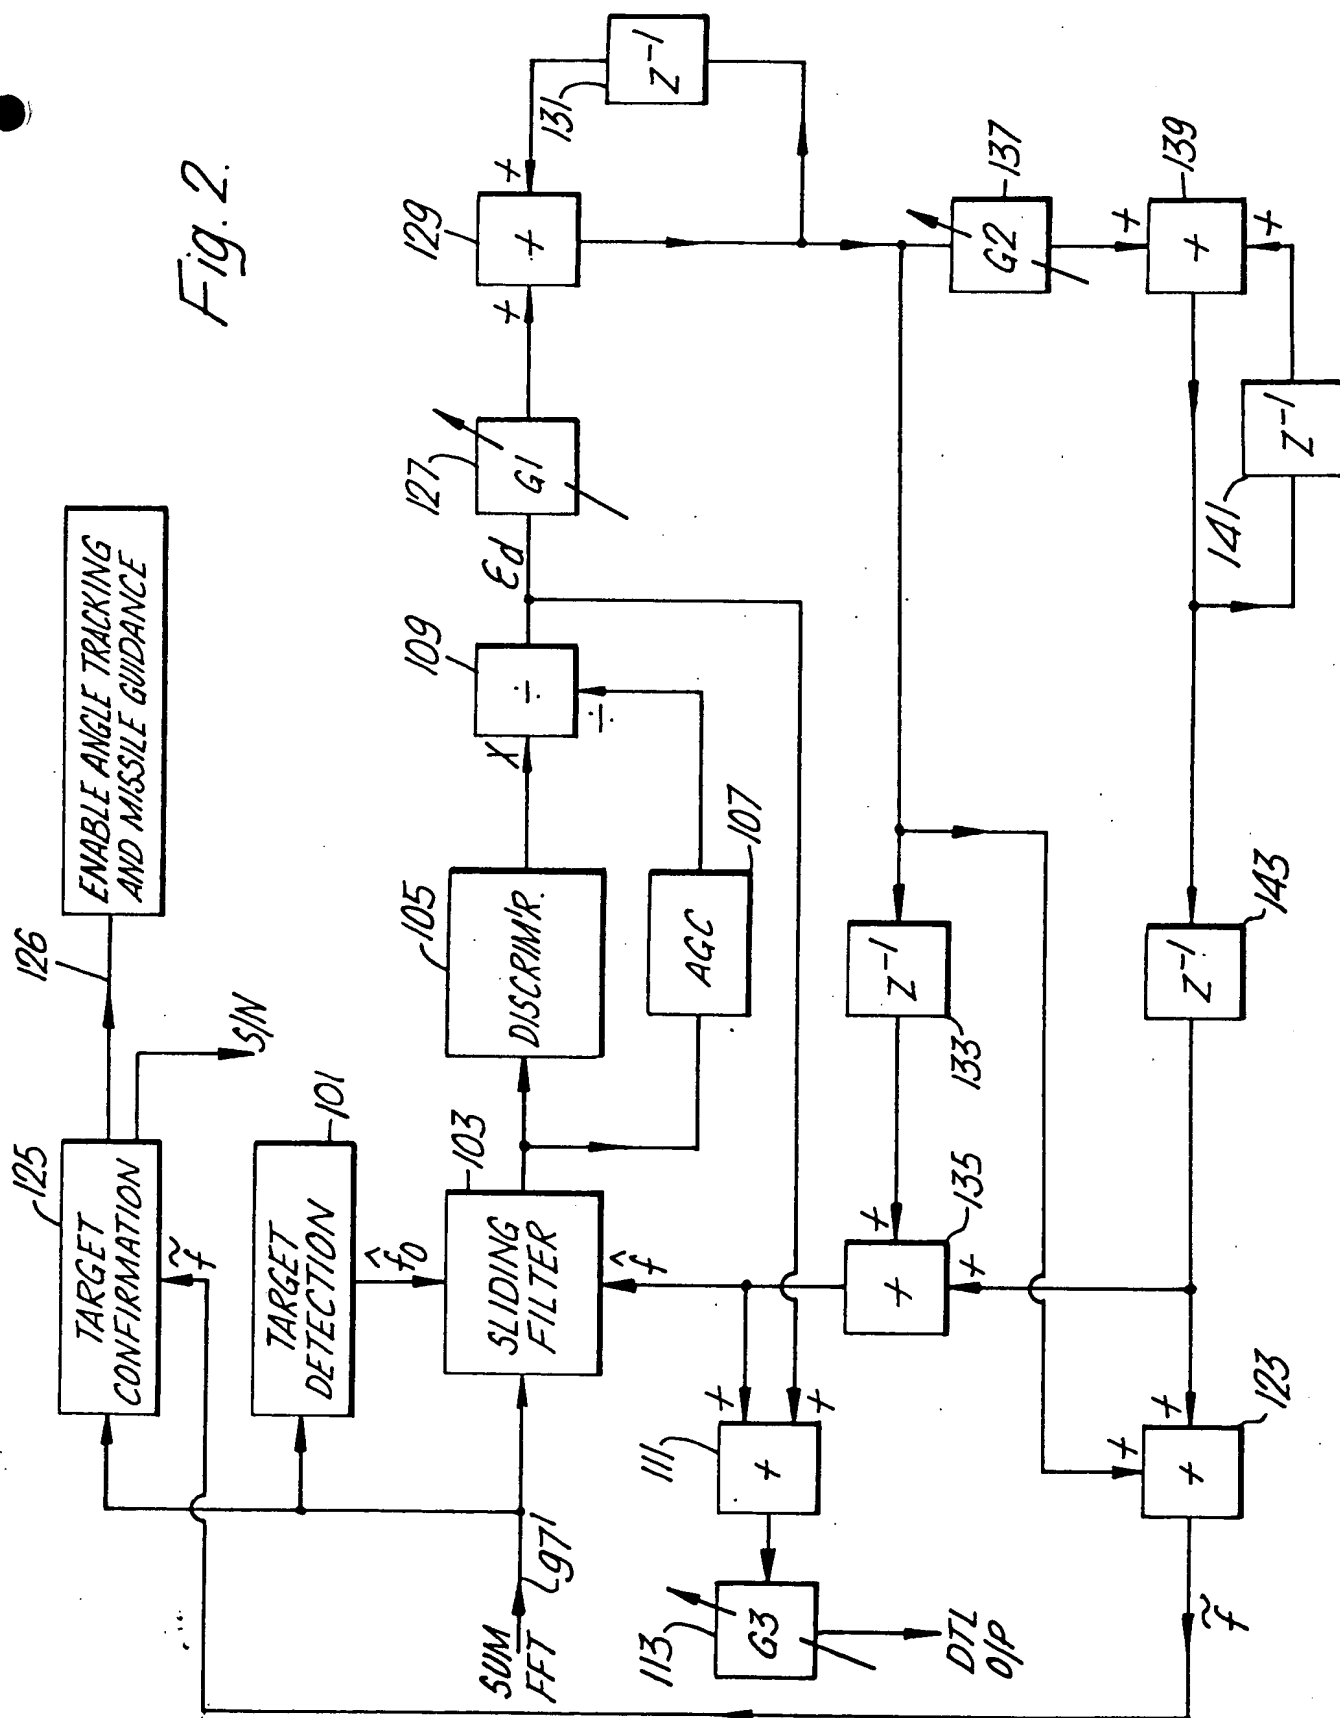

CONFIDENTIAL

CONFIDENTIAL

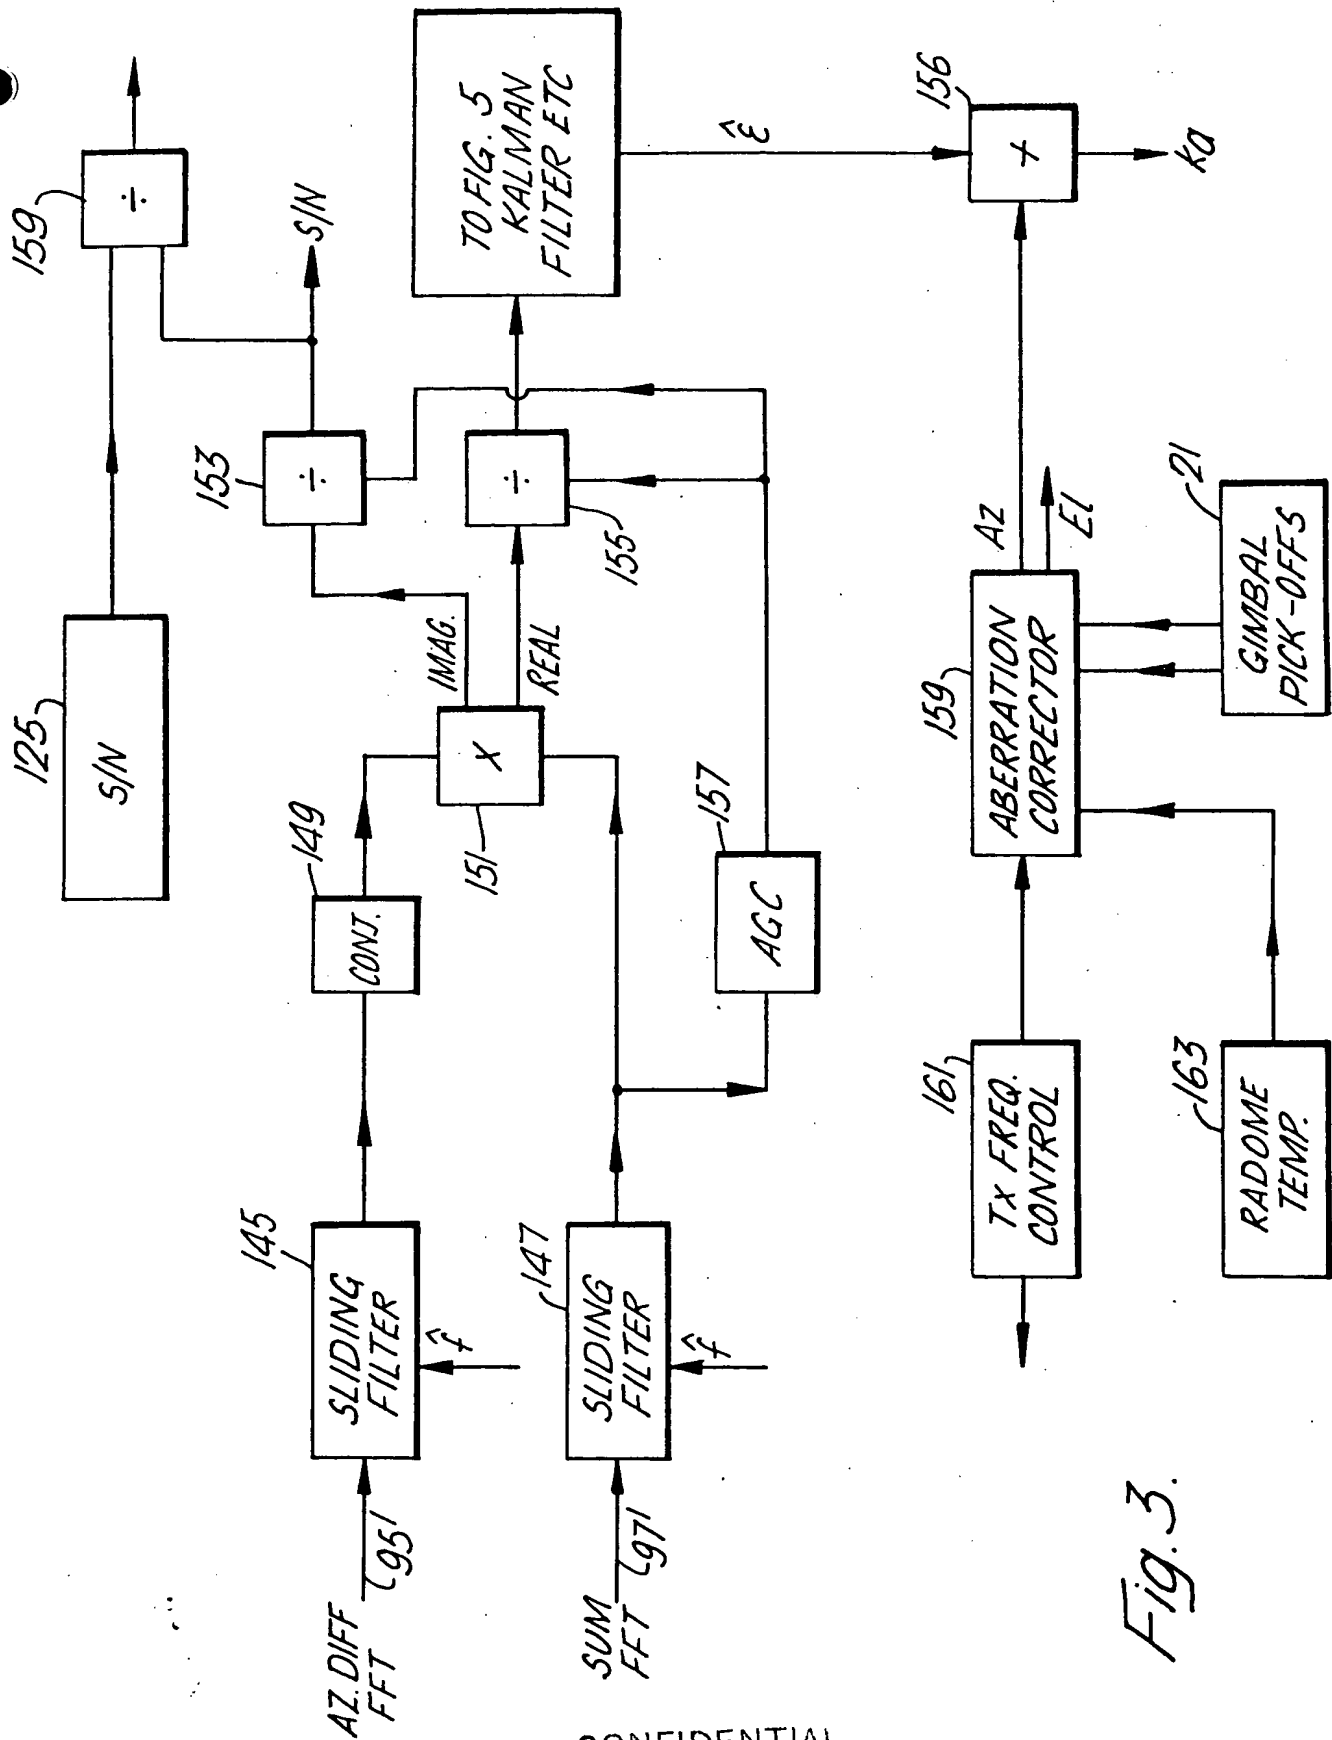


Fig. 3.

CONFIDENTIAL

CONFIDENTIAL

Fig. 4.

<div>MOVING AVERAGE</div> <div>INCREASING SUM TEST</div>	<i>REJECT</i>	<i>DON'T KNOW</i>	<i>CONFIRM</i>
<i>CONFIRM</i>	<i>DON'T KNOW</i>	<i>CONFIRM</i>	<i>CONFIRM</i>
<i>REJECT</i>	<i>REJECT</i>	<i>DON'T KNOW</i>	<i>CONFIRM</i>

CONFIDENTIAL

CONFIDENTIAL

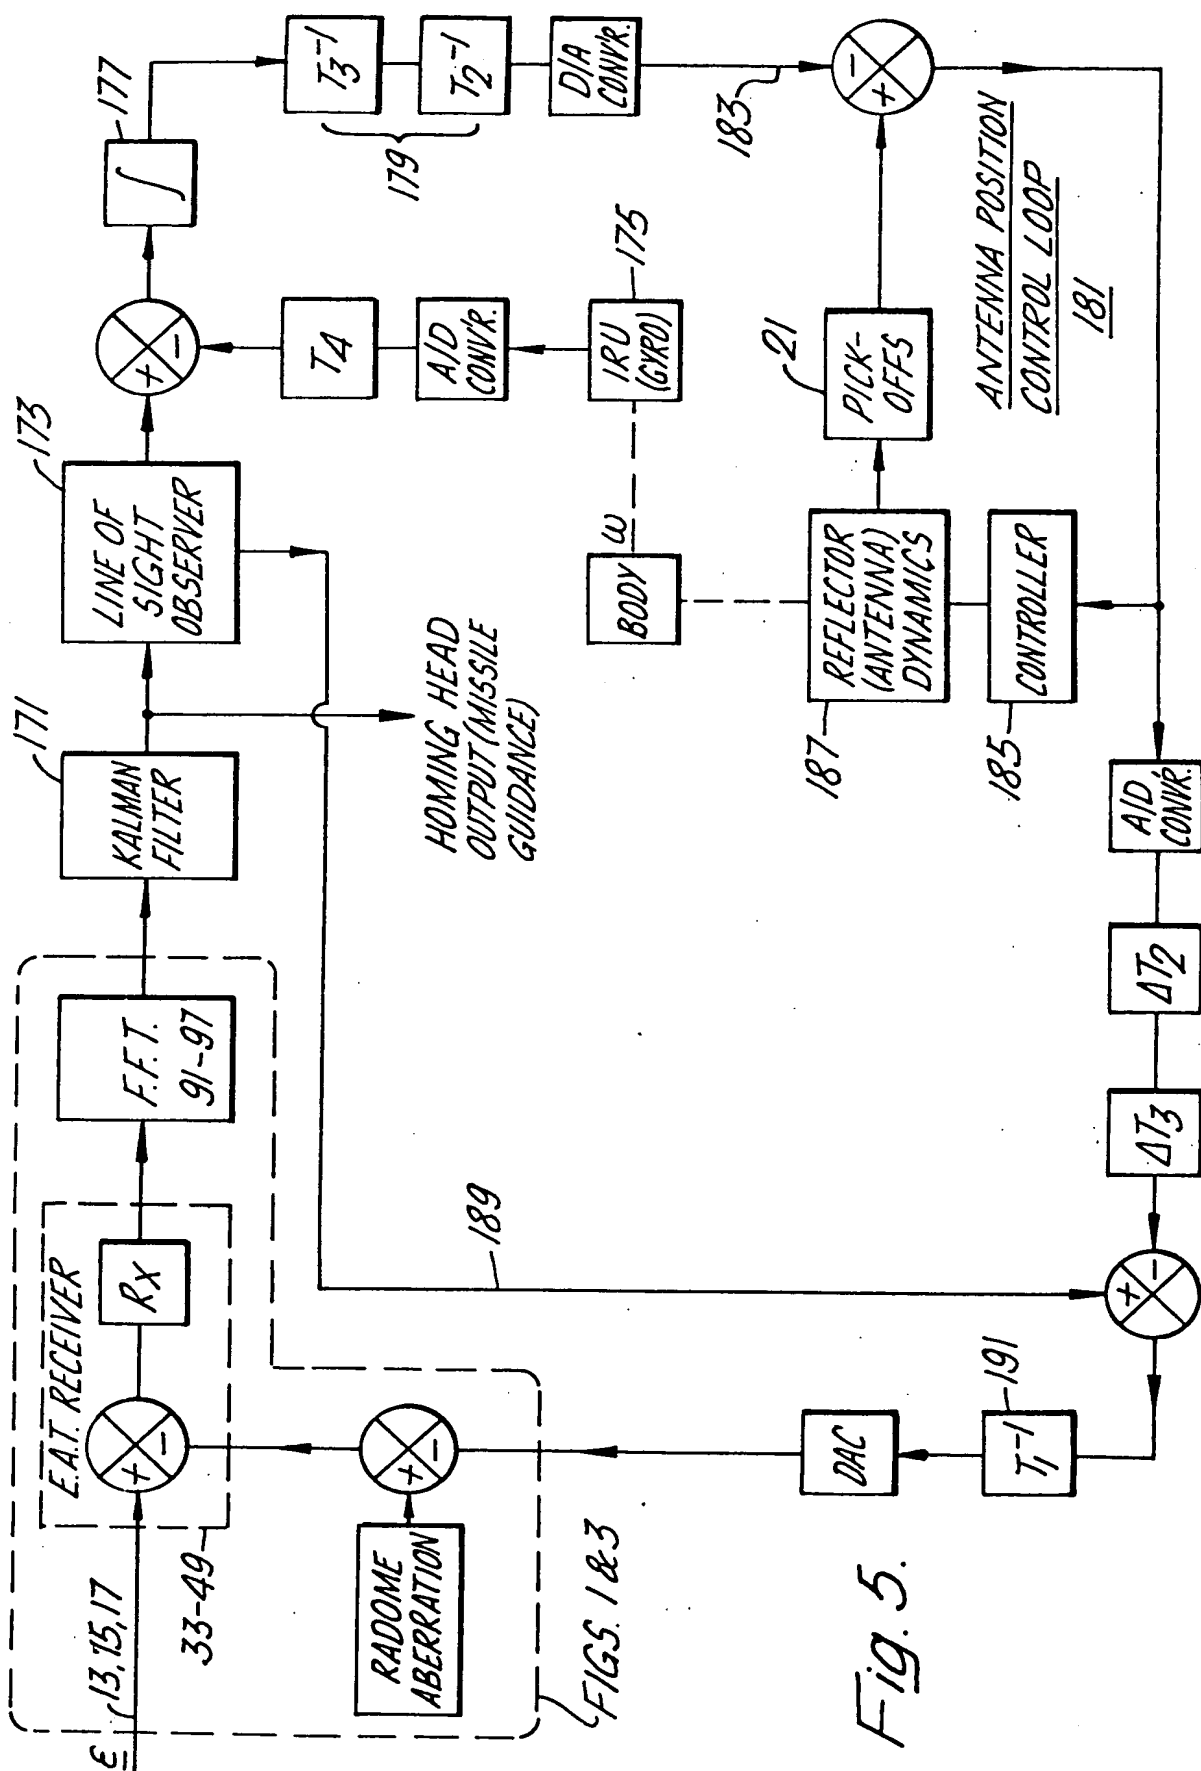


Fig. 5.

CONFIDENTIAL

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.